

APPLICATION

- ATM in Bank,
- Automatic window bind,
- Medical instrument,
- Cosmetology instrument,
- IT Mechanism,
- Security cameras

PICTURES



GEARBOX MOTOR SPECIFICATION


Type	Ratio		1:3.7	1:5	1:16	1:19	1:27	1:51	1:79	1:100	1:139	1:190	1:253	1:305	1:352	1:408	1:516	1:596	1:721	1:1012
D323	Rated torque	kg.cm	04	05	15	18	25	35	6	8	12	14	18	24	28	34	38	45	45	45
	Rated speed	rpm	1600	1300	380	320	220	120	76	59	51	32	24	20	17	15	12	10	8	6
Gearbox	Instantaneous torque	Kg.cm	15			30			45			60								
	Allowable torque	Kg.cm	10			20			30			40								
	Length	mm	28			37.5			47			56.5								
	Backlash	O	0.7			0.8			1			1								
	Weight	g	133			162			190			218								

MOTOR DATA

Frames volt (V)	No road speed (rpm)	Noroad current (mA)	Rated torsion (g.cm)	Raterd speed (rpm)	Raterd current (mA)	Output power (w)	Weight (g)
3A7K8-24V	7800	100	120	6800	495	8.25	102

Note: Product voltage, output shaft size, electrical performance, you can request custom-made!

MOTOR CHARACTERISTICS

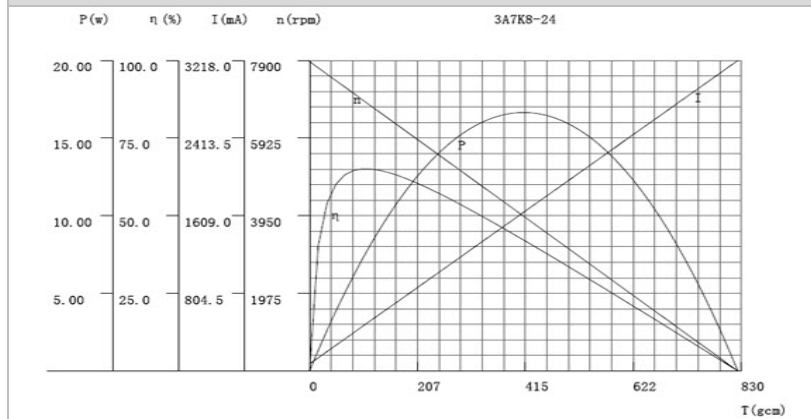

Mechanical Dimensions

